




IMPORTED BEARING OF AMERICA CORP.

17 mm x 30 mm x 7 mm 17 mm x 30 mm x 7 mm NTN 6903LLU deep groove ball bearings

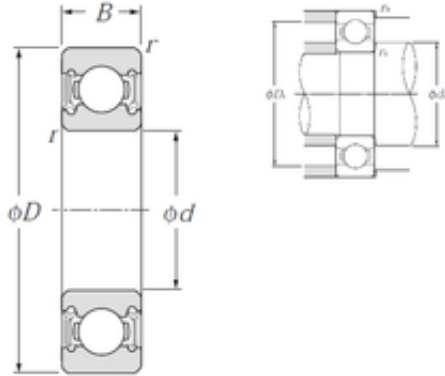

Bearing No. 6903LLU

6903LLU Bearing 2D drawings and 3D CAD models

Size	17x30x7 mm
Bore Diameter	17 mm
Outer Diameter	30 mm
Width	7 mm
d	17 mm
D	30 mm
B	7 mm
C	7 mm
r min.	0,3 mm
da min.	19 mm
da max	20 mm
Da max.	28 mm
ra max.	0,3 mm
Weight	0,018 Kg
Basic dynamic load rating (C)	4,65 kN
Basic static load rating (C0)	2,58 kN
Reference speed	14 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.018
EAN	4547359006612
Product Group	B00308
Enclosure	2 Seals



IMPORTED BEARING OF AMERICA CORP.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	17MM Bore; 30MM Outside Diameter; 7MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6903LLU/2AS
Weight / LBS	0.04
Outside Diameter	1.181 Inch 30 Millimeter
Bore	0.669 Inch 17 Millimeter
Outer Race Width	0.276 Inch 7 Millimeter
bore diameter:	17 mm
static load capacity:	2580 N
outside diameter:	30 mm
precision rating:	ISO Class 0
overall width:	7 mm
finish/coating:	Uncoated



IMPORTED BEARING OF AMERICA CORP.

bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	7 mm
snap ring included:	Without Snap Ring
outer ring width:	7 mm
internal clearance:	CN
maximum rpm (grease):	14000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	0.3 mm
dynamic load capacity:	4650 N
manufacturer product page:	Click here